

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number
WO 03/096624 A1

(51) International Patent Classification⁷: **H04L 12/28**

(21) International Application Number: PCT/GB03/01766

(22) International Filing Date: 25 April 2003 (25.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0210862.9 11 May 2002 (11.05.2002) GB

(71) Applicant (for all designated States except US):
CEDARDELL LIMITED [GB/GB]; Wardens End,
Low Warden, Hexham, Northumberland NE46 5SN (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TODD, Robert,
Edmund** [GB/GB]; 38 Broadway, Blyth, Northumberland
NE24 2PP (GB).

(74) Agent: **VINSOME, Rex, Martin**; Urquhart-Dykes &
Lord, St Nicholas Chambers, Amen Corner, Newcastle
Upon Tyne NE1 1PE (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF INSERTING A COMMUNICATIONS MODULE INTO A WIRELESS COMMUNICATION SYSTEM

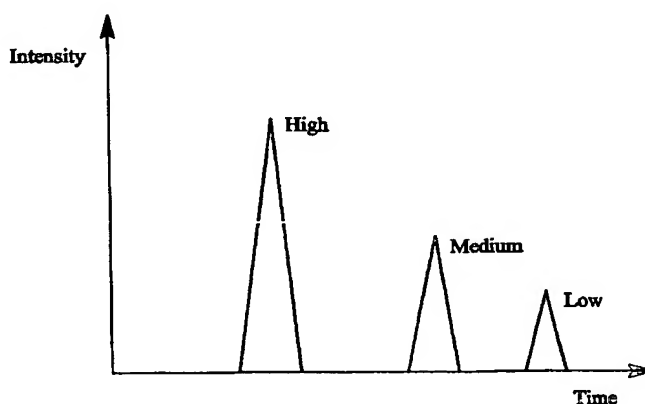

(57) Abstract: A radio frequency communication system comprises a control module (1) and communications modules (2, 3) the modules communicating with each other by means of radio frequency signals. Initially, the control module (1) is allocated address number (0) and the communications modules (2, 3) are allocated address numbers (1) and (2) respectively. The system shown in figure (1) is set up as a loop arrangement, in which signals are transmitted from communications module (3) directly to the control module (1), so that the control module is also allocated address number (3). When a new module (4) is to be inserted into the system at the location shown in Figure (1), the new module (4) is caused to emit a first message, in a set up mode, at low, medium and high power levels, as shown in Figure (2). The message transmitted by the module (4) at each power level contains data identifying whether it has been transmitted at high, medium or low power level.

WO 03/096624 A1

-1-

Method of inserting a communications
module into a wireless communication system

The present invention relates to a method of inserting a communications module into a wireless communications system.

Wireless communications systems are known which comprise at least one control module and a plurality of communications modules arranged such that the system can transmit messages either directly or indirectly between modules. In configuring the system, a decision needs to be made as to which modules communicate directly with which other modules. This decision is often made on the basis of received signal strength indication (RSSI) measurements, which measure the intensity of radio frequency radiation (i.e. based on the electric or magnetic field strength of the radio frequency radiation received at a particular receiving module). Communication links are then set up on the basis of these measurements, based on the assumption that the communication link from a particular transmitting module will be most effective with that receiving module which receives the radio frequency signal of highest intensity.

However, the existing system suffers from the drawback that the assumption that a receiving module receiving a signal of high intensity will also be able to effectively receive messages cannot always be made. For example, in urban locations where signals are reflected or obstructed by buildings, a signal of high intensity may be received, but interference effects may prevent the message carried by that signal from being decoded.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to the present invention, there is provided a method of inserting a communications module into a wireless communication system comprising at least one control module and

-2-

a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:-

(i) causing a second communications module, which is to be inserted into the system, to transmit a plurality of first messages in a set up mode, wherein at least two said first messages are transmitted at different power levels and contain data representing said power levels;

(ii) causing said second communications module to be installed to communicate directly, when in said communication mode, with at least one said communications module which correctly received a said first message.

By arranging the second communications module to communicate directly with a first communications module which correctly received a said first message, this provides the advantage of not relying on the assumption that the most reliable communications link is with the first module receiving the signal of highest intensity. This in turn provides the advantage that the system is more reliable than the prior art.

The method may further comprise the step of causing said second communications module to be installed to communicate directly, when in said communication mode, with at least two said communications modules which correctly received a said first message..

The method may further comprise the step of causing said second communications module to communicate directly with the pair of

-3-

first communications modules which directly received a said first message most reliably.

The method may further comprise the step of allocating points to each said first message received by said first communications modules, wherein first messages received at lower power levels are allocated larger numbers of points, and said second communications module is caused to communicate directly, when in said communication mode, with the pair of modules allocated the largest total number of points for first messages received from said second communications module.

This provides the advantage of setting up communications links, in the case of the second communications module being adapted to communication with two first communications modules, on the basis of the best overall receipt of first messages by a pair of first communications modules, and thus avoids the situation in which the second communications module is caused to communicate with a first communications module which receives messages well and a first communications module which receives messages badly.

The second communications module may be caused to be installed by means of a second message, from at least one said control module updating the address of a said first module which correctly received a said first message.

The method may further comprise the step of causing said second module to communicate directly with the first communications module which correctly received a said first message transmitted at lowest power level.

The method may further comprise the step of causing said second communications module to communicate with the first communications module which correctly received a said first signal at the largest number of different power levels.

-4-

The first messages may be transmitted at at least three different power levels.

The method may further comprise the step of setting the power level of transmission from said second communications module in said communication mode to a predetermined first communications module in response to the power level of a said first message received by said predetermined first communications module.

This provides the advantage of enabling the power of transmission of a particular link between the second communications module and a predetermined first communications module to be adjusted according to the reliability of receipt of the message by the first communications module. This provides the further advantage of minimising power waste.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic representation of a wireless communication system to which a communications module is to be added; and

Figure 2 is a representation of first message transmitted power level versus time of the unit to be added to the system of figure 1.

Referring to Figure 1, a radio frequency communication system comprises a control module 1 and communications modules 2, 3 the modules communicating with each other by means of radio frequency signals. Initially, the control module 1 is allocated address number 0 and the communications modules 2, 3 are allocated address numbers 1 and 2 respectively. The system

-5-

shown in figure 1 is set up as a loop arrangement, in which signals are transmitted from communications module 3 directly to the control module 1, so that the control module is also allocated address number 3. However, it will be understood that the present invention is also applicable to communications systems set up in a linear chain arrangement.

When a new module 4 is to be inserted into the system at the location shown in Figure 1, the new module 4 is caused to emit a first message, in a set up mode, at low, medium and high power levels, as shown in Figure 2. The message transmitted by the module 4 at each power level contains data identifying whether it has been transmitted at high, medium or low power level.

The existing modules 1, 2, 3 which correctly receive the message from the new module 4 are identified, and the system makes a decision as to which pair of modules 1, 2 or 3 should communicate directly with new module 4 on the basis of which pair of modules most reliably decoded the transmitted messages. For example, points are allocated such that three points represent a module correctly receiving a message at low power level, two points the message correctly received at medium power level, and one point represent a message correctly received at high power level. The system is then arranged to install the new module 4 into the system such that it communicates directly, when in the communications mode, with the pair of existing modules 1, 2 or 3 having the highest total number of points allocated for a message from the new module 4.

For example, if existing unit 1 receives a signal from the new unit at medium and high power levels, the module 2 receives a signal from module 4 at all three power levels, and the module 3 receives the message from module 4 at high power level only, the modules 1, 2 and 3 are allocated 3, 6 and 1 points respectively. The adjacent pair of modules 1, 2 or 3 having

-6-

the highest number of points is the pair consisting of modules 1 and 2, and the new module 4 is therefore installed in the loop between modules 1 and 2, i.e. to communicate directly with those two modules. As a result, new module 4 is allocated address number 1, and the addresses of existing modules 2 and 3 are incremented by one to address numbers 2 and 3 respectively, and the second address in control module 1 is incremented to 4.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only and not in any limitative sense, and that various alternations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

-7-

CLAIMS

1. A method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:-

(i) causing a second communications module, which is to be inserted into the system, to transmit a plurality of first messages in a set up mode, wherein at least two said first messages are transmitted at different power levels and contain data representing said power levels;

(ii) causing said second communications module to be installed to communicate directly, when in said communication mode, with at least one said communications module which correctly received a said first message.

2. A method according to claim 1, further comprising the step of causing said second communications module to be installed to communicate directly, when in said communication mode, with at least two said communications modules which correctly received a said first message.

3. A method according to claim 2, further comprising the step of causing said second communications module to communicate directly with the pair of first communications modules which directly received a said first message most reliably.

-8-

4. A method according to claim 3, further comprising the step of allocating points to each said first message received by said first communications modules, wherein first messages received at lower power levels are allocated larger numbers of points, and said second communications module is caused to communicate directly, when in said communication mode, with the pair of modules allocated the largest total number of points for first messages received from said second communications module.

5. A method according to any one of the preceding claims, wherein said second communications module is caused to be installed by means of a second message, from at least one said control module updating the address of a said first module which correctly received a said first message.

6. A method according to any one of the preceding claims, further comprising the step of causing said second module to communicate directly with the first communications module which correctly received a said first message transmitted at lowest power level.

7. A method according to any one of the preceding claims, further comprising the step of causing said second communications module to communicate with the first communications module which correctly received a said first signal at the largest number of different power levels.

8. A method according to any one of the preceding claims, wherein the first messages may be transmitted at at least three different power levels.

9. A method according to any one of the preceding claims, further comprising the step of setting the power level of transmission from said second communications module in said communication mode to a predetermined first communications

-9-

module in response to the power level of a said first message received by said predetermined first communications module.

10. A method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method substantially as hereinbefore described with reference to the accompanying drawings.

-1/1-

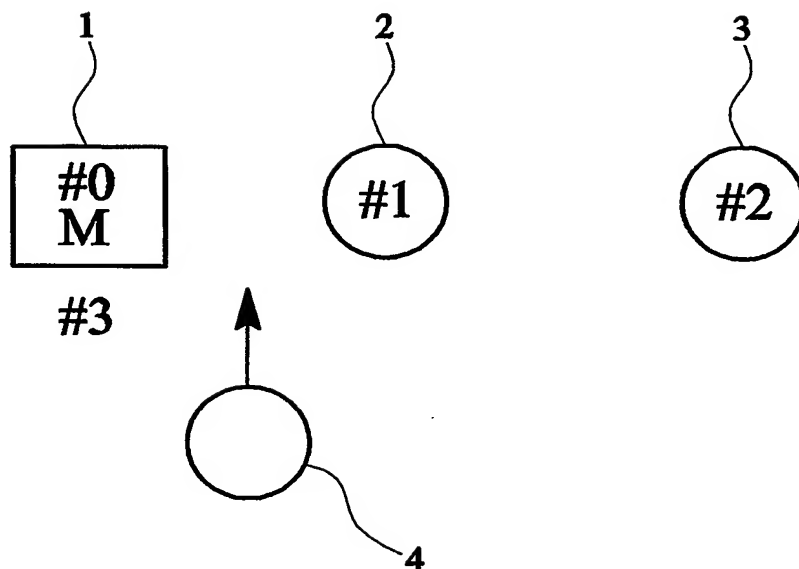


FIG. 1

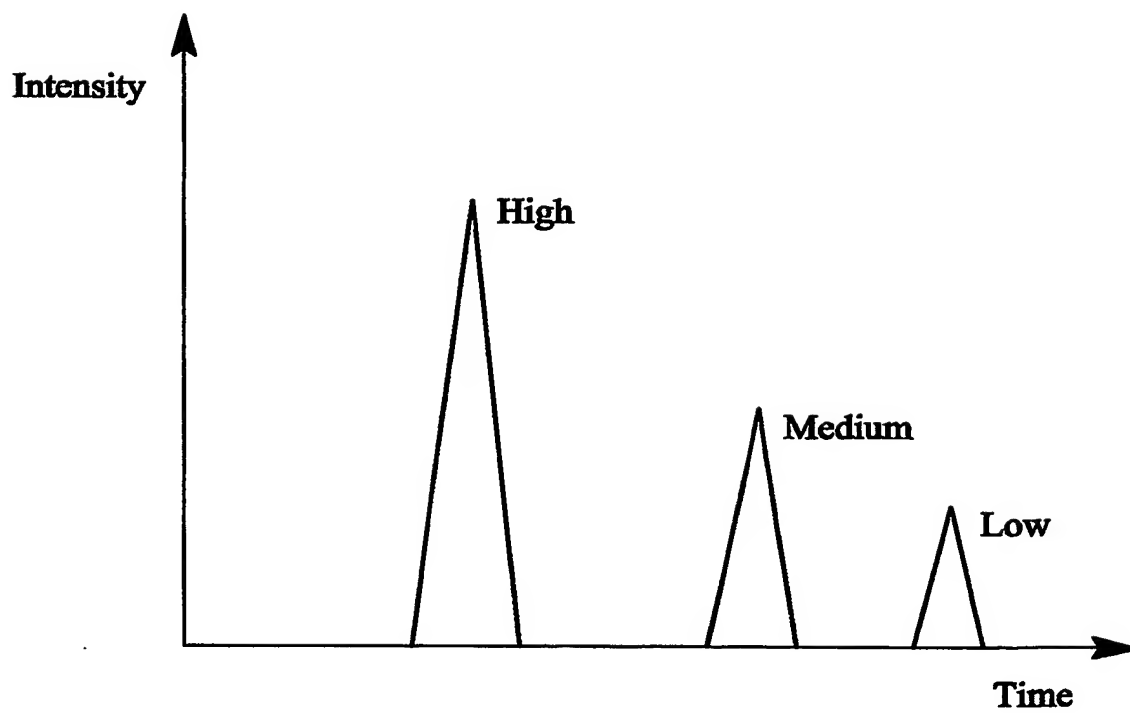


FIG. 2

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01766

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L 608B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 15112 A (CEDARDELL LTD ;TODD ROBERT EDMUND (GB)) 1 March 2001 (2001-03-01)	1,5,8-10
A	page 1, line 3 - line 11 page 2, line 11 - line 29 page 7, line 3 - line 25	2-4,6,7
Y	EP 0 579 372 A (NCR INT INC) 19 January 1994 (1994-01-19) column 2, line 38 - line 51 column 3, line 53 -column 4, line 6 column 6, line 34 -column 7, line 5	1,5,8-10
A	WO 02 25969 A (MOBILNET CORP) 28 March 2002 (2002-03-28) page 8, line 8 -page 9, line 20 page 10, line 7 -page 11, line 6 page 13, line 1 - line 10 page 16, line 4 -page 17, line 2	1-10

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

8 document member of the same patent family

Date of the actual completion of the international search

1 October 2003

Date of mailing of the international search report

09/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Heinrich, D

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01766

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0115112	A	01-03-2001	AU 6003300 A	19-03-2001
			CA 2382203 A1	01-03-2001
			EP 1208550 A1	29-05-2002
			WO 0115112 A1	01-03-2001
			JP 2003507987 T	25-02-2003
EP 0579372	A	19-01-1994	EP 0579372 A2	19-01-1994
			JP 3340804 B2	05-11-2002
			JP 7283812 A	27-10-1995
			US 5553316 A	03-09-1996
WO 0225969	A	28-03-2002	US 6606482 B1	12-08-2003
			AU 9114901 A	02-04-2002
			WO 0225969 A1	28-03-2002